

# A120 SLIDE RAIL HP (3 step pulling • pulling out type)



For heavy weight, load capacity **45kgf** type HP series have been released

Suitable for the bottom drawers of the kitchen storage and the desk



3 step pulling slide rail	Load capacity 45 kg type	Full travel
Lever pulling	Adjustment mechanism	When closed
Length 250~750mm	For left and right use	

## Point

### Point 1 “Smooth movement”

Evolving precision of the machinery and the equipment made it happen much smoother movement


### Point 2 “More secure”

Further improved the great popular K Lever  
Put “K Lever Cover” as safety mechanism to prepare for a malfunction

Before improvement



After improvement

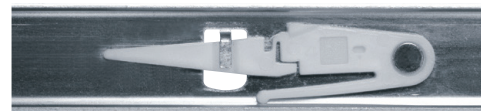

### Point 3 “Reinforce the catching power”

Improving the mold pattern and dimensional accuracy of the catch rubber evolved stabilization and sustainability of the catching power.




## Feature • Advantage

Square corner




A120 Side

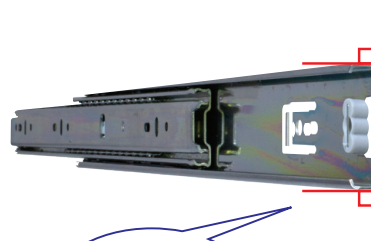


Easy positioning enabled easy installing!!

Stronger than round shape and not easy to deform

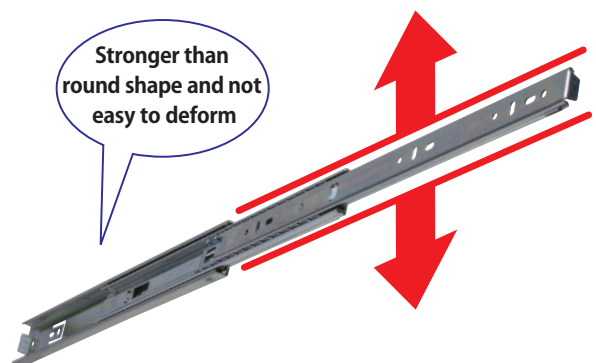

## K Release Lever

When released (up)


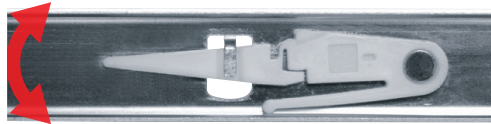


When released (down)

K Lever is KOJIMA's original

Regarding installing and removing of the conventional slide rail, the release lever moved only one way up/down and also needed reverse left/right operation


So, it was difficult to make sure to be released and as a result it made it easy to break by pulling out with unreasonable force.

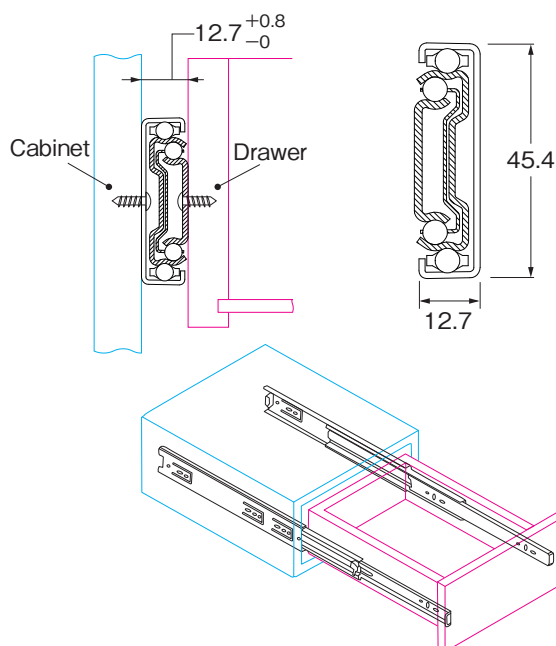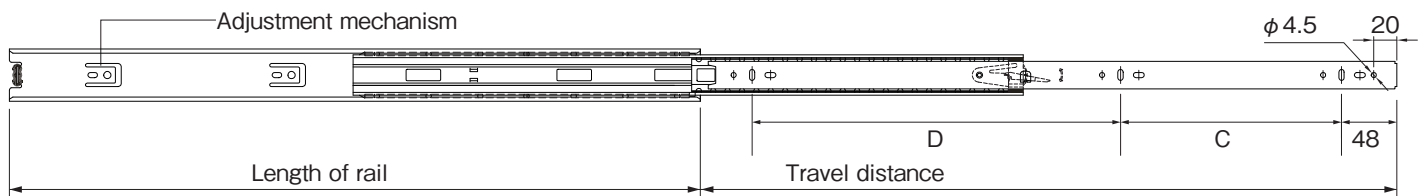

- The action of K Lever enables easy installing and removing
- Load capacity 45kgf/pair
- Material/ Steel
- Finish/Unichrome plating
- Recommended screw: 3.5mm truss

Specific dimension						(Unit: mm)
Product number	Length of rail	Travel distance	C	D	Quantity	
A120-250	250	250	160	-	10 pairs	
A120-300	300	302	192	-		
A120-350	350	354	96	256		
A120-400	400	400		288		
A120-450	450	452	128	352		
A120-500	500	515	160	416		
A120-550	550	558	192	448		
A120-600	600	600		512		
A120-650	650	650	224	544		
A120-700	700	705		608		
A120-750	750	755	256	640		

## A110 SLIDE RAIL KP (3 step pulling • pulling out type)

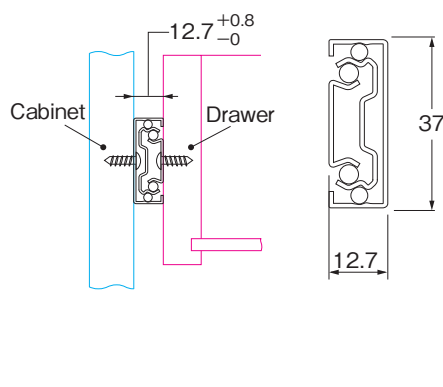

- The action of K Lever enables easy installing and removing.
- Load capacity 25kgf/pair
- Material/ Steel
- Finish/Unichrome plating
- Recommended screw: 3.5mm truss

Specific dimension					(Unit: mm)
Product number	Length of rail	Travel distance	Quantity		
A110-200	200	213	20 pairs		
A110-250	250	254			
A110-300	300	305			
A110-350	350	356			
A110-400	400	406	10 pairs		
A110-450	450	457			
A110-500	500	508			
A110-550	550	559			
A110-600	600	610			

※Please have a look at our web-site and catalogue about detail dimension of A120

**Kojima** METAL FITTING CORPORATION

Head office 3-4-1 Motoasakusa, Taito-ku, Tokyo 111-0041, Japan

TEL +81-3-3843-3141 FAX +81-3-3843-3144

Kasukabe branch 1-26-20 Kasukabehigashi, Kasukabe-shi, Saitama 344-0062, Japan

TEL +81-48-760-3881 FAX +81-48-760-3883

✉ [kojima\\_global@kojima-mf.co.jp](mailto:kojima_global@kojima-mf.co.jp)

