

G331 Free pitch concealed shelf support




- Concealed shelf support not to show shelf support.
- Load is dispersed to whole shelf rail, not to each shelf support.
- Easy to install. First of all install support rail to the wall with screws. Next, install it to shelf support rail and move horizontally.
- Installing support rails horizontally makes it to be able to multiple shelf support rails horizontally. It saves energy to level each one separately.
- Easy to cut support rails adjusting to width of shelves because it is made of aluminum. Also can put additional processing of screw holes adjusting to installation position.
- Load capacity/in case of using 2 of G331-HB : 12kgf
(Tip load in case of less than 700mm pitch, 200mm shelf depth)
In case of using G331-SR 800mm + 2 of G331-HB: 10kgf
(Between shelf supports in case of less than 700mm pitch, 200mm shelf support depth)
- Width of shelf board/more than 24mm



G331-HB Shelf support



- Concealed shelf support not to show shelf support
- Can manage inclination by tightening insertion holes for tilt adjustment
- Material/Steel
- Finishing/Trivalent chromate
- Quantity/100 pcs.

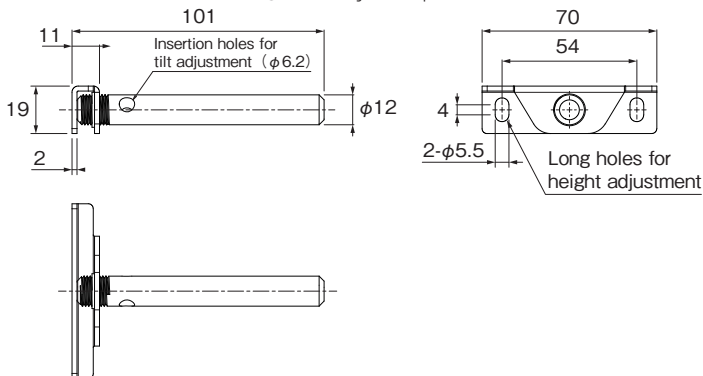



Optioning products G331-SP Set plate



- Necessary items to install shelf support to support rail
- Necessary 1 set plate for 1 shelf support
- Material/Steel
- Finishing/Trivalent chromate
- Accessories/M5 × 8 pan 2 small screws, 2 flat washers
- Quantity/100 pcs.

G331-SR Support rail

G331-SR800 Support rail L800 (with hole)

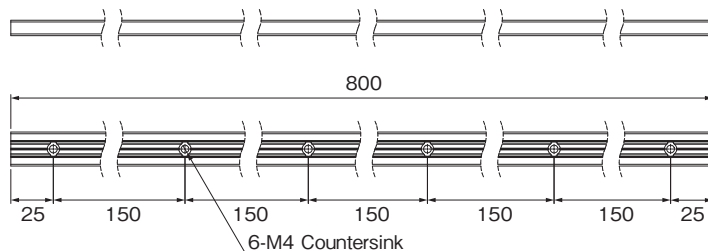

- Material/Aluminum
- Finishing/Anodized aluminum
- Quantity/100 pcs.


※ Installation holes are not processed for G331-SR2000

Please get countersinking in case of using M4 flat head screw

Hole drilling is enough in case of using M4 flat head screw

Make sure that sliding parts inside the rail don't interfere screw heads and screw heads

G331-SR2000 Support rail L2000 (without holes)

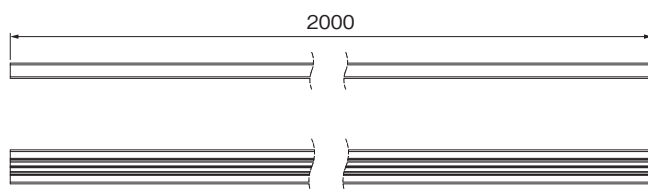

Option item


G331-TAP6420UC Screw for installation of support rail

- Dedicated screw to use in case of hole processing to Support rail
- Can't be used when you countersink hole
- Small head tapping plate D=6 4 × 20
- Material/ Steel
- Finishing/Uniqlo
- Quantity/1 pack with 50 pcs. One pack unit item (Cannot be sold separately)




Installation procedure

①

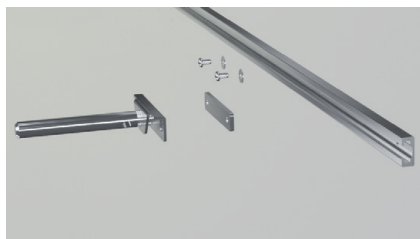


Get ready necessary items

②

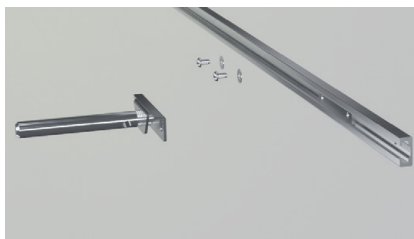


Put G331-SR set plate in G331-SR support rail

③

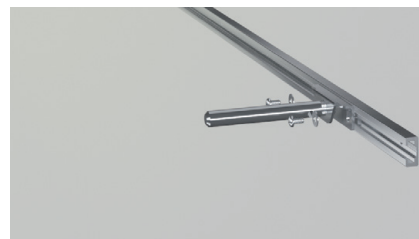


Install G331-HB shelf support with the accessory screws of G331-SP set plate

④

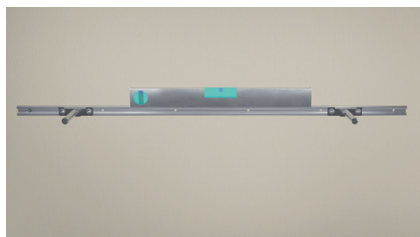

Screw G331-SR on support rail at one place and level it with a leveler

⑤

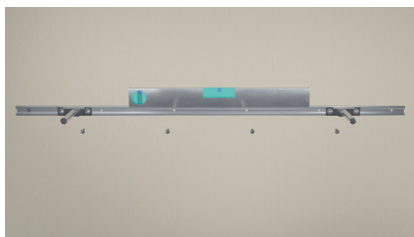


Screw all screw holes after determining horizontal positions


⑥



Install shelf plate and complete

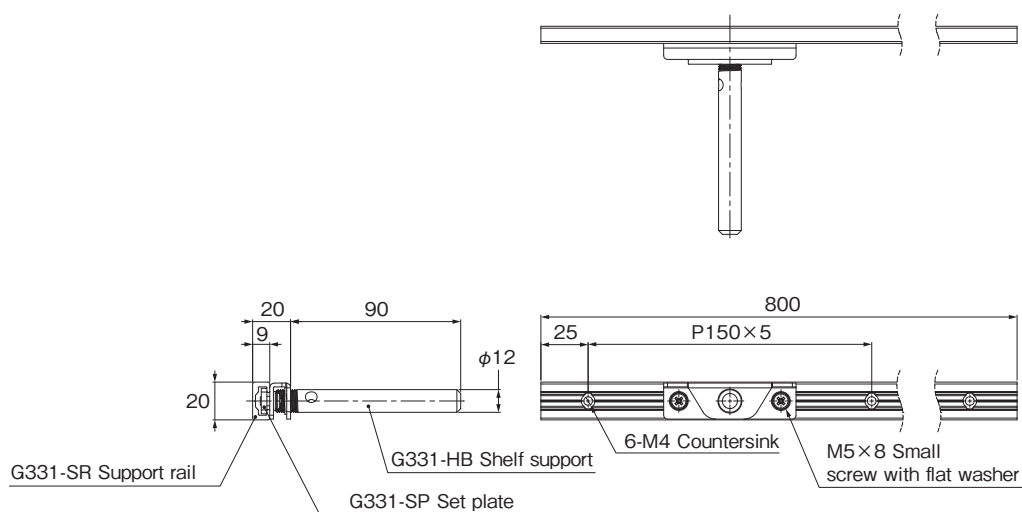

Reference diagram for shelf digging dimensions

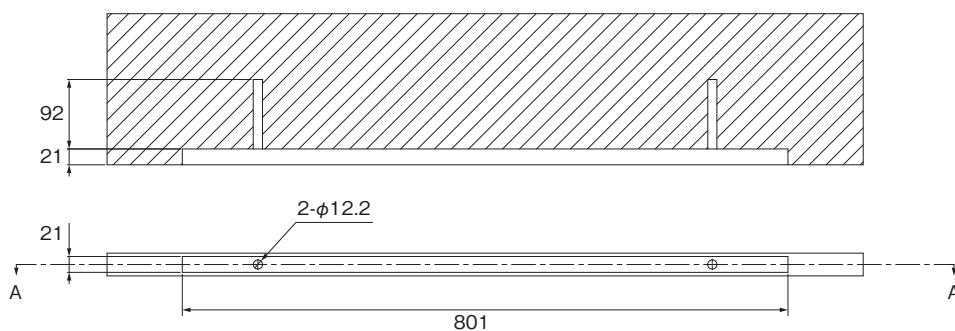

Kojima METAL FITTING CORPORATION

Head office

3-4-1 Motoasakusa, Taito-ku, Tokyo 111-0041, Japan

TEL +81-3-3843-3141 FAX +81-3-3843-3144

Kasukabe branch

1-26-20 Kasukabehigashi, Kasukabe-shi, Saitama 344-0062, Japan

TEL +81-48-760-3881 FAX +81-48-760-3883

✉ kojima_global@kojima-mf.co.jp

