

K217 Aluminium Rail



K217-800-SL-A L800 (with holes)



K217-2000-SL-N L2000 (without holes)




K217-2000-BK-N L2000 (without holes)

- Material/Aluminium
- Finish/Alumite, Black baked paint
- Quantity/100 pcs
- ※Scratches are easy to stand, so please be careful when handing them.
- ※If using M4 flat head screws, please drill countersink holes. If using D105-TAP6420UC or M4D6 flat head screws, only hole drilling is required.




- Material/PLA
- ※included mounting screw

K217-CAP

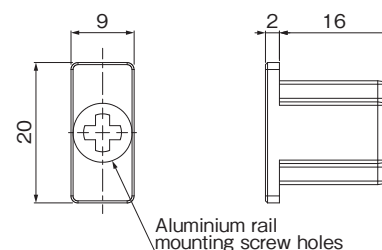


Screw into, inflate and fix it to the end of the K217 aluminium rail.

K217-800-SL-A L800 (with holes)

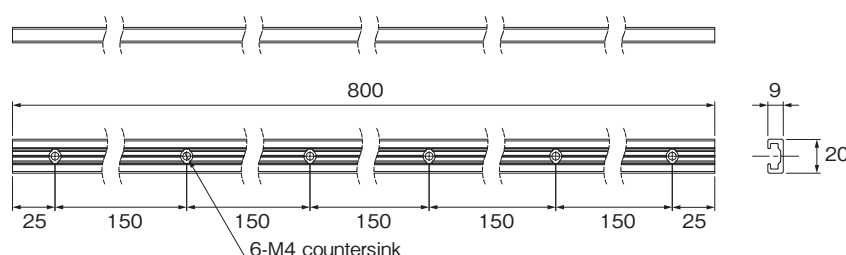

K217-2000-SL-N L2000 (without holes)

K217-2000-BK-N L2000 (without holes)

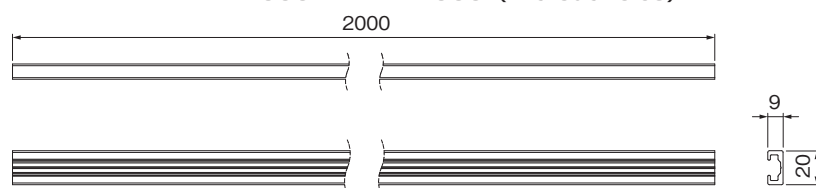

Option item D105-TAP6420UC



- Dedicated screw to use in case of hole processing to Aluminium rail
- ※Can't be used when you countersink hole
- Small head tapping plate D=6 4 x 20
- Material/ Steel
- Finish/Uniqlo
- Quantity/1 pack with 50 pcs
- One pack unit item
- (Cannot be sold separately)

Specification dimensions

Unit: mm

Product number	holes	L	Finish	Quantity
K217-800-SL-A	with	800	Silver (alumite)	100pcs
K217-2000-SL-N	without	2000	Black (baked paint)	
K217-2000-BK-N			Black	
K217-CAP	—	—	Black	200pcs

Kojima METAL FITTING CORPORATION

Head office 3-4-1 Motoasakusa, Taito-ku, Tokyo 111-0041, Japan

TEL +81-3-3843-3141 FAX +81-3-3843-3144

Kasukabe branch 1-26-20 Kasukabehigashi, Kasukabe-shi, Saitama 344-0062, Japan

TEL +81-48-760-3881 FAX +81-48-760-3883

✉ kojima_global@kojima-mf.co.jp

