


N425 Cable management brush



Possible to cut HSS, HS, A1 by scissors

- Can use for blindfolding OA equipment wirings and others
- RoHS compatible product
- REACH compatible product
- Can be compatible to process brush length/m by option

Bar-cut flex system HSS type

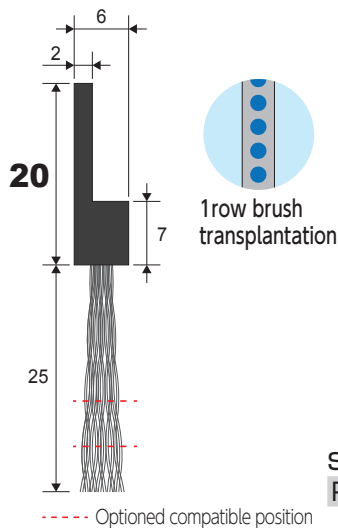

- Possible to cut by scissors
- Install by screw, tape
- Heatproof temperature: less than 80°C

✂ Option (brush transplantation/m)

Finishing brush length

15mm

20mm

Delivery schedule: Ship in 5 ~ 8 business days after order


Processing for 1 brush bar is only 1 kind
Processing is done by units of 1m

Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Quantity
N425-HSS-1000	25	0.2	TPE	PP Black wave	1,000	100g	100
N425-HSS-5000	25	0.2	TPE	PP Black wave	5,000	500g	100

Unit: mm

Bar-cut flex system HS type

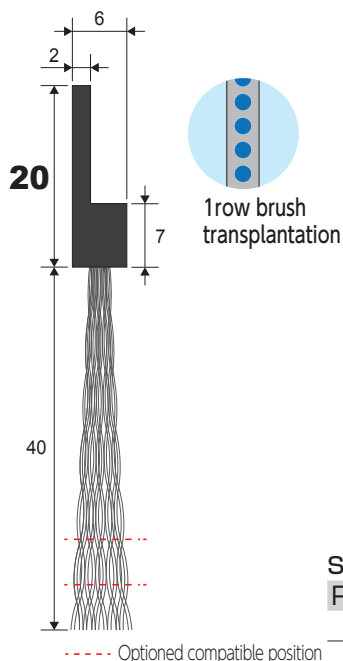

- Possible to cut by scissors
- Install by screw, tape
- Heatproof temperature: less than 80°C

✂ Option (brush transplantation/m)

Finishing brush length

30mm

35mm

Delivery schedule: Ship in 5 ~ 8 business days after order


Processing for 1 brush bar is only 1 kind
Processing is done by units of 1m

Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Quantity
N425-HS-1000	40	0.2	TPE	PP Black wave	1,000	120g	100
N425-HS-5000	40	0.2	TPE	PP Black wave	5,000	600g	100

Unit: mm

Bar-cut flex system A1 type

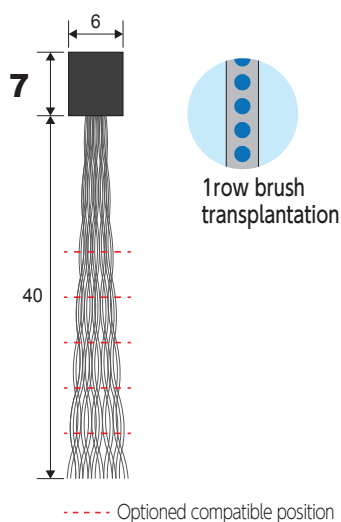

- Possible to cut by scissors
- PP compatible adhesive and others
- Heatproof temperature: less than 80°C

✂ Option (brush transplantation/m) Finishing brush length

15mm
20mm
25mm
30mm
35mm

Delivery schedule: Ship in 5 ~ 8 business days after order


Processing for 1 brush bar is only 1 kind
Processing is done by units of 1m

Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Quantity
N425-A1-1000	40	0.2	PP	PP Black wave	1,000	120g	100
N425-A1-5000					5,000	600g	

Unit: mm

Bar-cut flex system H825 type

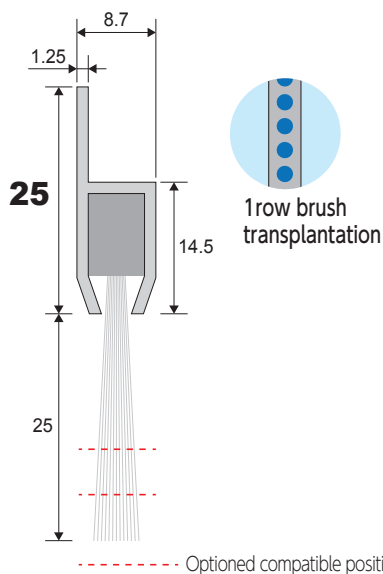

- Possible to adjust dimension toward long-side by hacksaw because of aluminum flame
- Install by screw, tape
- Heatproof temperature: less than 130°C

✂ Option (brush transplantation/m) Finishing brush length

15mm
20mm

Delivery schedule: Ship in 5 ~ 8 business days after order

Processing for 1 brush bar is only 1 kind
Processing is done by units of 1m

Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Quantity
N425-H825-500	25	0.2	Aluminum	PBT White	500	140g	100
N425-H825-1000					1,000	280g	

Unit: mm

Kojima METAL FITTING CORPORATION

Head office

3-4-1 Motoasakusa, Taito-ku, Tokyo 111-0041, Japan

TEL +81-3-3843-3141 FAX +81-3-3843-3144

Kasukabe branch

1-26-20 Kasukabehigashi, Kasukabe-shi, Saitama 344-0062, Japan

TEL +81-48-760-3881 FAX +81-48-760-3883

✉ kojima_global@kojima-mf.co.jp

